

# Secureroom IP65 LED

## Installation Instructions



Luminaire's light distribution is direct.

**LED**

Denotes which light source/light sources that can be supplied with the luminaire.



IP Classification: Product is IP65 : No ingress of dust; complete protection against contact (dust tight). Protected against low pressure jets of water from all directions.



Class 1: Appliances with functioning insulation. Equipped with an earth termination.



**RISK OF FIRE:** (a) The minimum clearance distance from the top of the luminaire to any normally flammable building element is 100mm. (b) The minimum clearance distance from the top of the luminaire to any building insulation is 100mm. (c) The minimum clearance distance from the side of the luminaire to any normally flammable building element is 100mm. (d) The minimum clearance distance from the side of the luminaire to any building insulation is 100mm. **WARNING – RISK OF OVERHEATING OR FIRE IF THE CLEARANCE DISTANCES ARE COMPROMISED.**



Luminaire is available in designs for conventional emergency lighting operation.



RCM: Indicates a device's compliance with applicable ACMA technical standards.



ESD: Personnel should be grounded when unpacking or handling the luminaire.



High Voltage: Luminaire circuitry exceeds a forward voltage of 50V.

## Important Information

Please read this guide carefully before installing or maintaining this equipment. Data should be used as an INDICATION only and good electrical practices should be followed at all times.

Must only be installed by a licensed electrician.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or their service agent or a similar qualified person in order to avoid a hazard.

For indoor use only.

A qualified electrician, in accordance with AS/NZS 3000:2007 wiring regulations should carry out connection to mains wiring.

This unit must be EARTHED.

Ensure that the rated voltage and frequency requirements are compatible with the available mains supply, 220-240V 50Hz.

Cleaning of reflectors and lenses should be carried out using clean, soft and lint free cloths and anti-static cleaning fluid.

Do not carry out high voltage insulation test i.e. 500/1000V this may damage the fixtures electrical components.

### Warning - Applicable to New Zealand (Only)

This luminaire is not suitable for installation in locations where thermal insulation is present, or may reasonably be expected to be installed in the future, or where there is a likelihood of other combustible material, e.g. Leaves or vermin debris, etc. collecting on or around the luminaire. It is not suitable for domestic installations or installation in residential areas of non-domestic installations (residential institutions, hotels, boarding houses, hospitals, accommodation houses, motels, hostels and the like).

This installation instruction is relevant to the standard version of the above family. Customised variants may have mechanical changes or may have changed mounting procedures.

# Secureroom IP65 LED

## Installation Instructions


### Exposed T-Bar

1. Lift the luminaire into the ceiling cavity.
2. Complete the electrical connection.
3. Position the luminaire centrally within the T-Bar.

### Plaster Ceiling

1. Remove the diffuser frame by unfastening the security fasteners (bit T25 with pin) and lanyards.
2. Lift the fitting into the ceiling cavity, ensure toggle arms are turned in and run flush against the body so it will enter ceiling cut out. Using a Phillips head screwdriver, turn the screw anticlockwise to ensure toggle recess arms are set to maximum travel to allow a maximum ceiling thickness of 50mm.

**\*Note: Ensure the ceiling has been reinforced around the cut out. Reinforcement to be fixed to the ceiling. To be supplied by contractor, reinforcement material such as timber battens, C-channel aluminium or steel is recommended. Please refer to below diagram.**

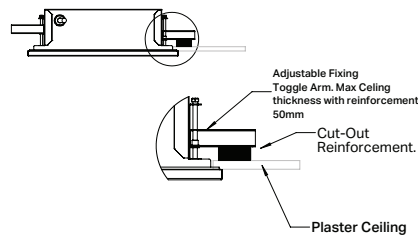

3. Use a Phillips head screwdriver in a clockwise direction to tension up toggle recess arms against inside of ceiling. Perform this on all six screws to secure fitting to ceiling.
4. Reattach all lanyards to frame, including earthing lanyard. Refasten all of the frame fasteners to the body

### Surface Mounted

1. Remove the diffuser frame by unfastening the security fasteners (bit T25 with pin) and lanyards as well as the gear tray.
2. Lift the surface mounted luminaire to the ceiling, feeding the supply cable through the cable entry hole.
3. Secure the luminaire onto the mounting surface with appropriate fasteners (not supplied) to suit the mounting substrate.
4. Complete electrical connection and reinstall the gear tray to the luminaire.
5. Reattach all lanyards to frame, including earthing lanyard. Refasten all of the frame fasteners to the body.
6. Once installed, it is the responsibility of the installer to seal the luminaire to the ceiling with suitable Anti-Pick Mastic (or similar).

This installation instruction is relevant to the standard version of the above family. Customised variants may have mechanical changes or may have changed mounting procedures.