


Aureled Dropped

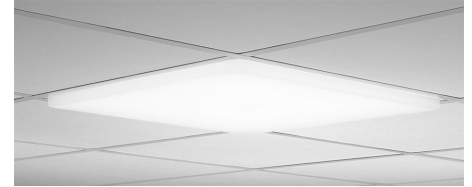


Key Family Details


Optical System:	Opal Diffuser
Mounting Type:	Exposed T-Bar Recessed
Finish Options:	Standard white
System Warranty:	5 years
CCT:	4000K
CRI (Ra):	90+
R9:	70+
COI Compliant:	Yes (COI<=1.5)

Mechanical Drawing

Physical Parameters	Luminaire Dimensions			Cutout Size		Weight
Code	L [mm]	W [mm]	H [mm]	CL [mm]	CW [mm]	[kg]
EL-AUR-3110-000	593	593	56	-	-	4.5
EL-AUR-3111-000	593	593	56	-	-	4.5

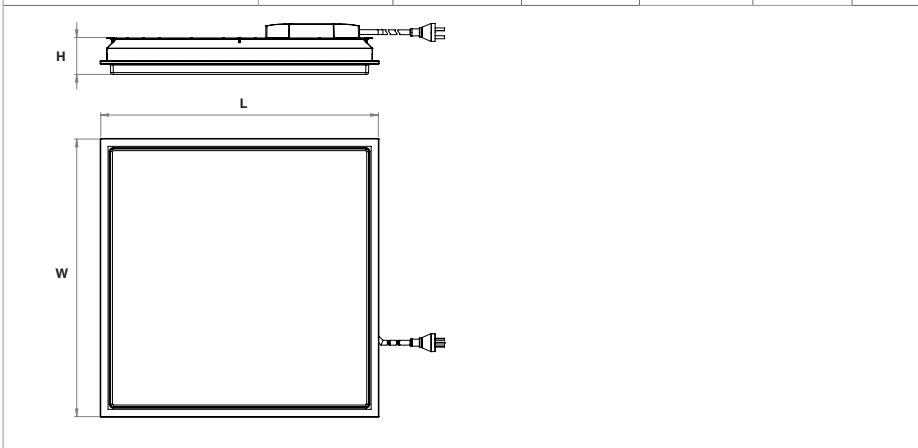

Polar Curve 1200x300

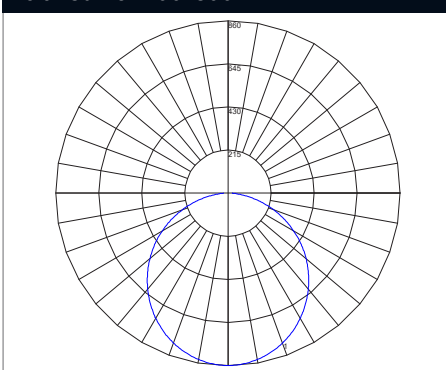

Maximum Candela = 860cd/klm
 Located At Horizontal Angle = 22.5, Vertical Angle = .5

Application

For commercial lighting applications where a solution with an alternate visual presence is required, Aureled Dropped delivers that change in design style. The dropped diffuser profile provides a complimentary visual appeal and allows light to graze the ceiling delivering an impression of brightness within the space.

Design

The dropped Aureled diffuser blends a combination of opal lens and LED technology to deliver balanced lighting conditions along with increased vertical illumination in non-critical viewing spaces. Illuminated areas appear bright and well-lit with Aureled Dropped.

Optics:

The opal lens diffuser eliminates any view of distracting LED micro points while maintaining even luminance distribution control across the lower panel and sides of the diffuser.

Controls:

In today's carbon constrained world, product control options, operational control, sustainability and optimised material manufacturing techniques are critical considerations in product specification. The extensive features of Aureled Dropped meet the highest possible manufacturing standards.

Circadian Lighting:

Quality of light is an inherent element of wellness, productivity, vitality, creativity and satisfaction in any workplace. The increased vertical illumination and visual interest created by Aureled Dropped ensures the lighting environment created will support and enhance the experience for people occupying a space.


Installation:

The shallow profile of Aureled is the perfect solution in ceiling spaces where recess depth is confined. Coupled with a detachable gearbox incorporating a plug-and-play connector Aureled Dropped can fit the tightest of spaces.

Notes:

- ORT Enabled
- Surface Mount
- Plaster Recess Kit
- Restraint kit
- Tuneable White

Aureled Dropped

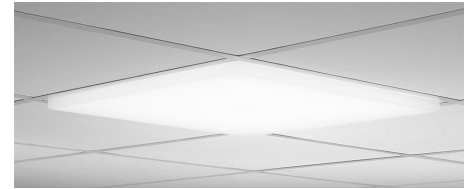

330 Lux Target Illuminance

Code	CCT	Power [W]	Systems Lumens [lm]	Luminaire Lumens [lm]	Efficacy Initial [lm/W]	Nominal Size [mmxmm]	Target Spacing	UGR	TM21 L90 Lifetime [hrs]
									LM80 DURATION 10,000 hrs
EL-AUR-3110-000	4000K	19	2,818	2,472	133	600x600	2.4m x 2.4m	22	43,000
Restraint Kit - 4 x gripple, 2 x 2m wire									

410 Lux Target Illuminance

Code	CCT	Power [W]	Systems Lumens [lm]	Luminaire Lumens [lm]	Efficacy Initial [lm/W]	Nominal Size [mmxmm]	Target Spacing	UGR	TM21 L90 Lifetime [hrs]
									LM80 DURATION 10,000 hrs
EL-AUR-3111-000	4000K	31	5,000	4,318	139	600x600	3.0m x 3.0m	22	43,000
Restraint Kit - 4 x gripple, 2 x 2m wire									

Wiring options







Suffix

Standard	-000
DALI	-200
Maintained Emergency	-800
DALI Monitored Emergency	-801
Organic Response (SN3)	-950

Aureled Dropped

TM-30-18 Colour Rendition Report

EL-AUR-3111-xxx

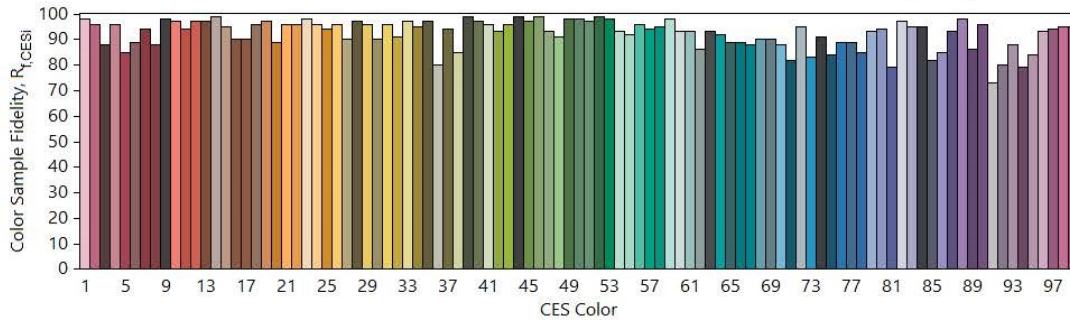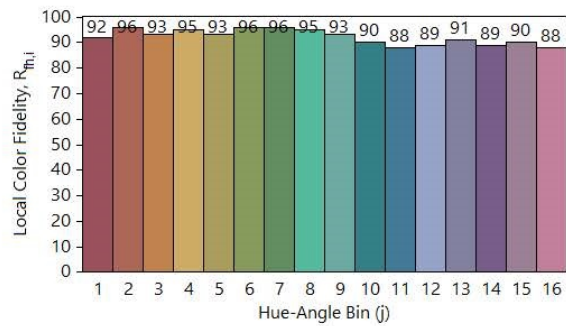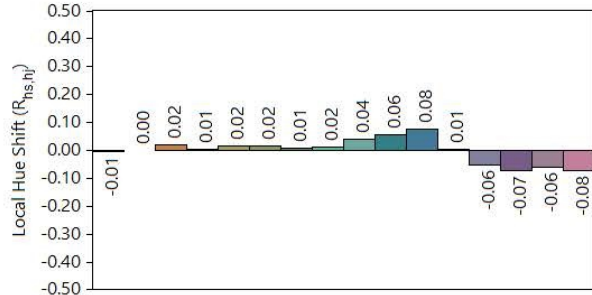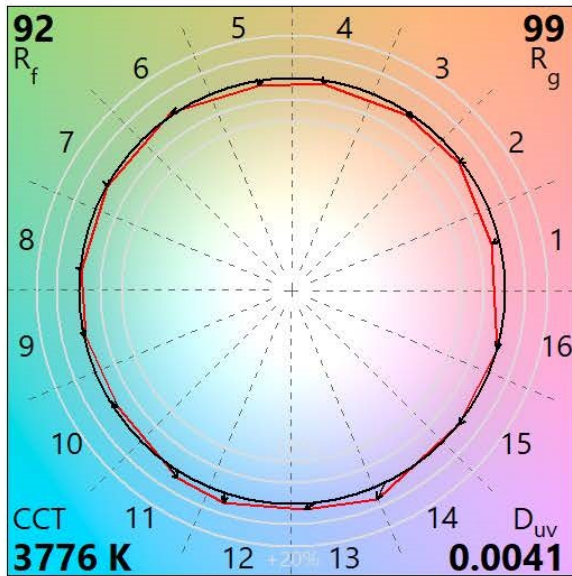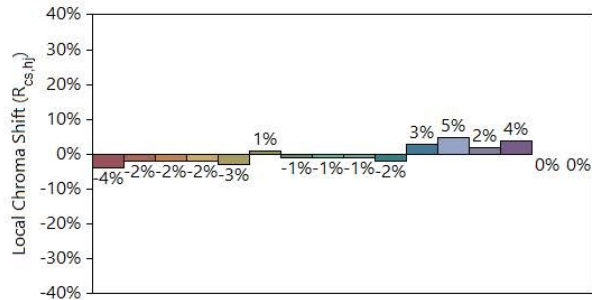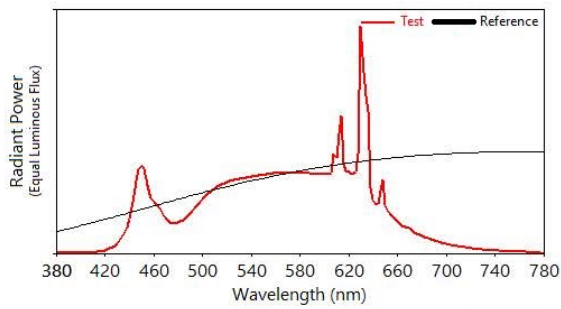

Notes: AURELED DROPPED OPAL ET 31W 5000LM 940 600X600 variants

x 0.3943
y 0.3940
u' 0.2273
v' 0.5110

CIE 13.3-1995

(CRI)

R_a 95

R_g 73

Colors are for visual orientation purposes only.