

Flicker Test Report



Test condition

Photometric Type: Luminous Flux(lm) **Test range:** Range2 **Sampling Mode:** Software

Samplerate: 20 kS/s **Sampling Time:** 180.00 s


Test Wave

Local Waveform(0.000-180.000s)

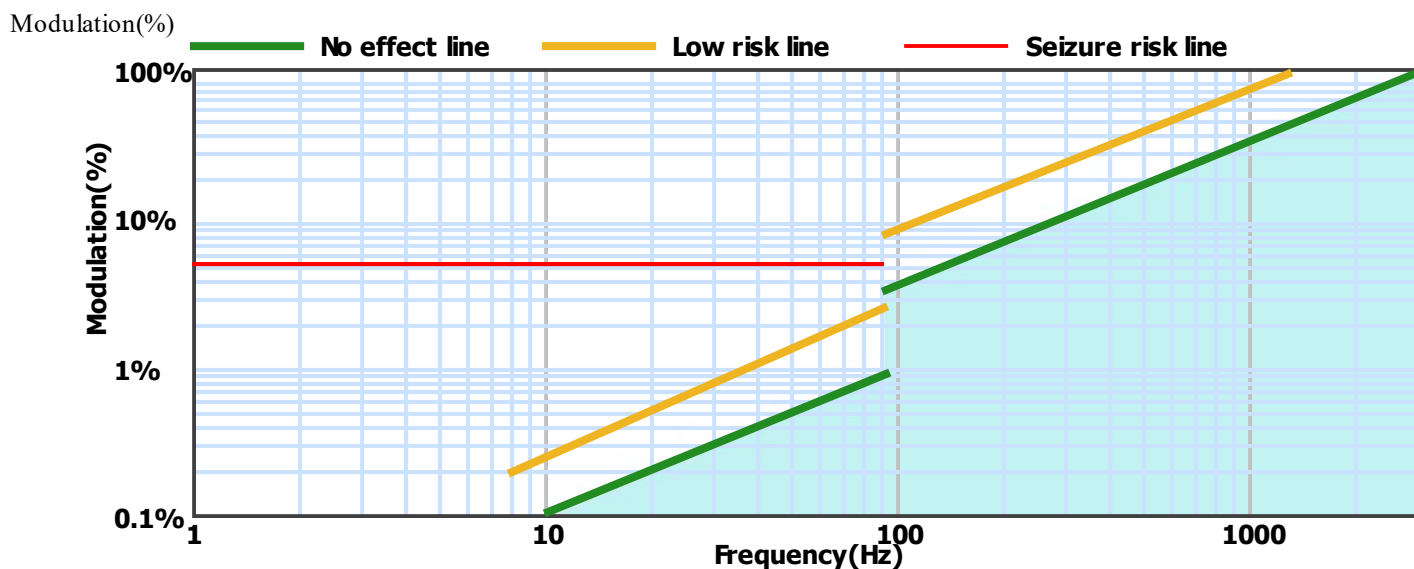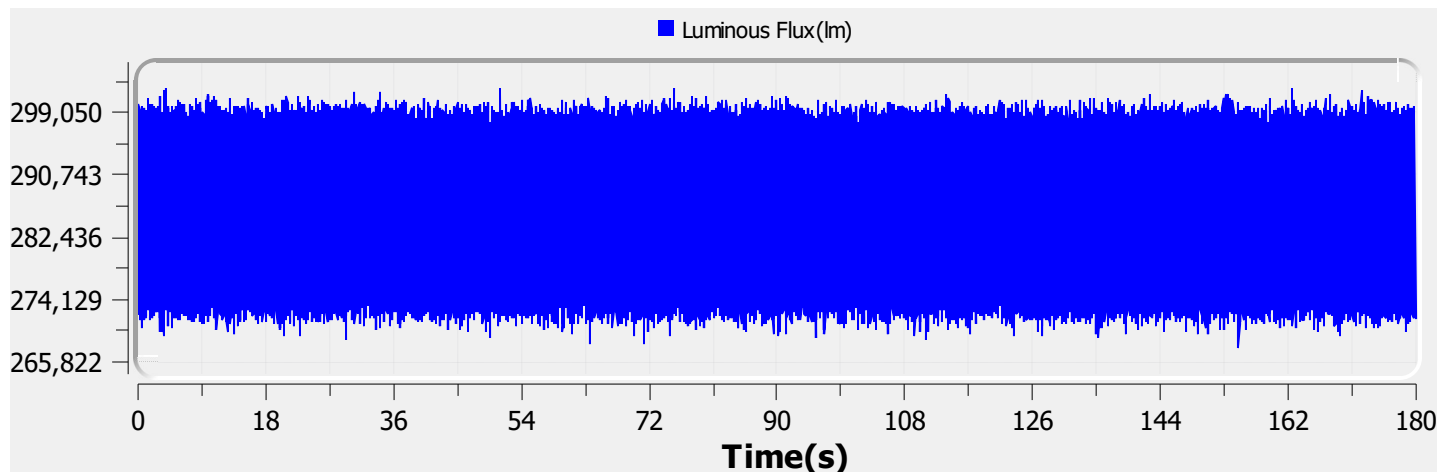

Name:	EL-AURH-3103-200	Type:	EL-AURH-3103-200
SN:	ELA-10989-F	Manufacturer:	Eagle Lightng
Tester:	Jules Zaccak	Sample time:	2023-10-2 15:54:56
Lamp base orientation:	Horizontal	Description:	AURELED HYGIENE 34W 5330LM 940 DELA 600X600
Remark:		Standard:	IESNA 2000,CIE TN 006,etc

Relative Spectrum Waveform

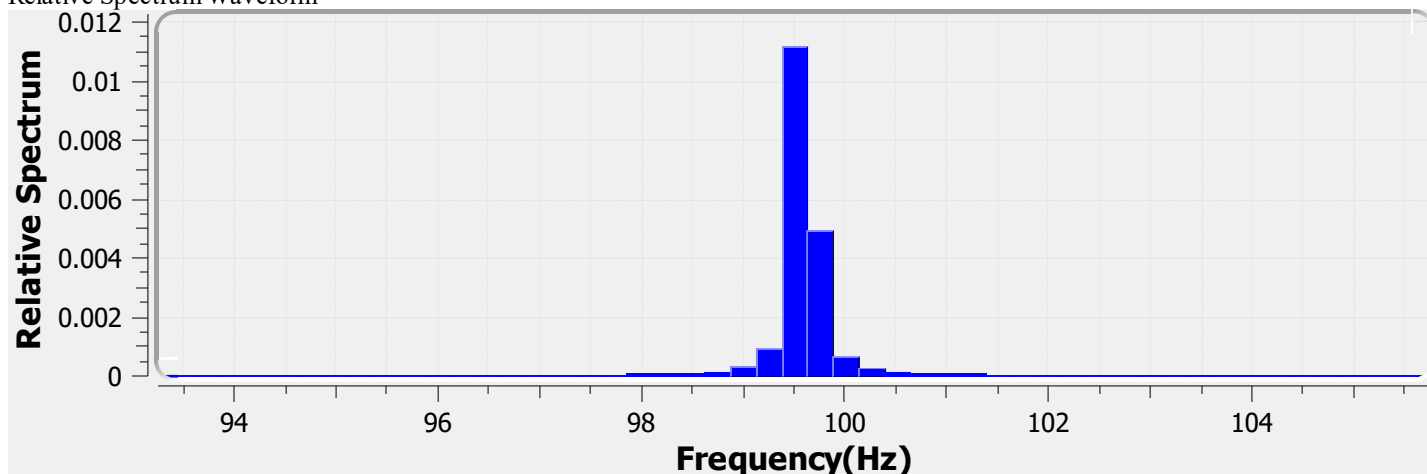

Test Result

Avg(lm):	285.504 k	Max(lm):	302.278 k	Min(lm):	267.666 k
BASIC					
Frequency:	99.500 Hz				
IEC-Pst [10KS/s]					
Pst:	0.013	Result:	very acceptable		
CA CEC					
PAM:	6.073%	PAM(40Hz):	0.114%	PAM(90Hz):	0.183%
PAM(200Hz):	1.689%	PAM(400Hz):	1.984%	PAM(1000Hz):	3.087%
ASSIST					
Flicker Index:	0.007	Percent Flicker:	4.164%	d:	0.000%
a:	0.000	MP:	0.0	fb:	0.000Hz
DP:	0%	Acceptability:	no consider stroboscopic effects		
IEEE Std 1789					
NM1:	0.201	NM2:	0.481	Module Depth:	4.164%
Risk level:	No effect				
CIE SVM					
SVM:	0.054	Visibility:	Not Visible		

Name:	EL-AURH-3103-200	Type:	EL-AURH-3103-200
SN:	ELA-10989-F	Manufacturer:	Eagle Lightng
Tester:	Jules Zaccak	Sample time:	2023-10-2 15:54:56
Lamp base orientation:	Horizontal	Description:	AURELED HYGIENE 34W 5330LM 940 DELA 600X600
Remark:		Standard:	IESNA 2000,CIE TN 006,etc