



Discovery Evo



Installation

Four securing holes. For recess or surface mounting on ceilings or walls. Brackets for recessed installation ordered separately, please see accessories. There are holes for a surface mounted installation socket.

Connection

230 V integrated LED driver. Snap-in terminal block 5 × 2.5 mm². 1-phase through-wiring possible. Cable entry at rear or via knockouts for surface mounting, through wiring 0° or 180°.

Design

Luminaire body of polycarbonate and diffuser of opal polycarbonate.

Emergency lighting

The product is equipped with the ability to connect a monitoring system based on communication via DALI. The system is not dependent on a DALI system being connected or in operation. Emergency lighting luminaires can be supplemented with sensor on request.

Accessories

Anti-ligature casing in white enamelled sheet steel. Supplied with safety screws (tamper-proof torx) IK10, IP 55. Outdoor casing in lacquered aluminium, IK10, IP 55. Surface mounted mains cable possible.

LED-information

Driver life time: up to 100.000 h/10 % (max failure).

Luminaire									
System, W	K	lm	lm/W	Ra (CRI)	Life	SDCM	kg		
19	3000	2438	128	≥ 80	L ₉₀ B ₅₀ 60.000 h	3	1.6	FG-57728-0	●
19	4000	2566	135	≥ 80	L ₉₀ B ₅₀ 60.000 h	3	1.6	FG-57729-0	●
Emergency lighting luminaire, decentralised 3 h, self-test AT4 + DALI surveillance, can be supplemented with sensor.									
19	3000	2438	128	≥ 80	L ₉₀ B ₅₀ 60.000 h	3	2.0	FG-57728-800	
19	4000	2566	135	≥ 80	L ₉₀ B ₅₀ 60.000 h	3	2.0	FG-57729-800	


All versions listed above are stocked in Australia.

For current information, please refer to our website.

All photometric, spectrometric and electrical data have a tolerance of ±10%.

Accessories

Recess rings including spring clips for recess mounting	92650
Anti-ligature casing IK10, white	92651
Mounting plate for recessed installation in soft tile suspended ceilings.	92652
Outdoor casing IK10, white (RAL 9010)	92653
Outdoor casing IK10, anthracite grey (Gris 900 Sablé str.)	92654
Outdoor casing IK10, black (RAL 9005 str.)	92655
Remote control e-Sense Move DALI	86305

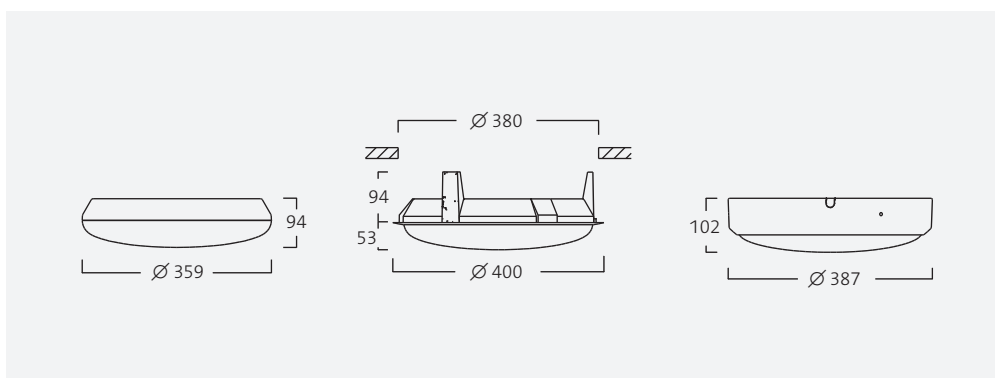

Outdoor accessories.