


PARKALUX RANGE

| | | |
|----|--------|----|
| IK | JOULES | IP |
| 14 | 100 | 54 |

- TRANSPORT
- CUSTODIAL
- SOCIAL HOUSING
- URBAN

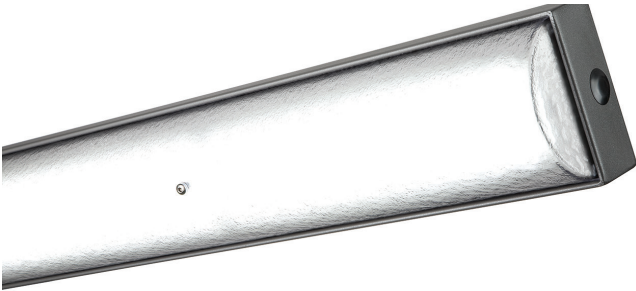

Parkalux is a practical luminaire with a small footprint that has been designed to withstand a high level of vandalism. This surface mounted fitting is an effective general lighting solution for both indoor and outdoor applications. It is the perfect choice in arrival halls, on platforms, in car parks/garages and in passageways.

The Parkalux Range consists of versatile and weather resistant linear fittings. They are suitable for ceiling and semi-recessed mounting.

designplan
LIGHTING

| Parkalux | | | | | | | |
|-----------------------|--------|------|-------|-----|-------------|------------------------|--|
| Code | Lumens | lm/W | CCT | Ra | Size | IK/IP | Lifetime |
| D333/4/3000NW/XC49 | 2866 | 103 | 4000K | >80 | 1245x125x90 | IK14/ IP54/ 100 Joules | L ₈₀ B ₅₀ 60khrs |
| D333/4/5000NW/XC49 | 4217 | 99 | 4000K | >80 | 1245x125x90 | IK14/ IP54/ 100 Joules | L ₈₀ B ₅₀ 60khrs |
| D333/4/5000NW/XB/EM3D | 4217 | 99 | 4000K | >80 | 1245x125x90 | IK14/ IP54/ 100 Joules | L ₈₀ B ₅₀ 60khrs |

| Option(s) |
|-----------------------------|
| DALI |
| Switch Dim |
| Corridor Function 10% |
| 3000K |
| Emergency 3hr Integral DALI |

